



# **FAST** **TTRAC**<sup>TM</sup>

by **WELLS CARGO**



**Entry-Level**

**TRAILERS**

# FASTTRAC™



The **FastTrac** brings a whole new level of value to the light-duty recreational hauler. A spirited combination of versatility and affordability, the **FastTrac** delivers on all fronts. From its unpretentious styling to its uncompromising safety, only Wells Cargo could pack so much value into an entry-level trailer. No other cargo trailer in its class offers attributes like a V-Front profile, rugged tubular steel main rails, platform lowering drop axles, smooth riding radial tires, and 3/4" interior flooring. There's no doubt about it, the **FastTrac** is a quick study in getting more bang for your buck!



4' WIDE



5' WIDE



6' WIDE



WIDTHS — 4', 5', 6' & 7' WIDE MODELS



See page 6 for complete specifications & features

7' WIDE

# FAST TRAC™



**AVAILABLE LENGTHS:**  
16', 20' AND 24'



**STANDARD INTERIOR:**  
3/8" SIDEWALLS & 3/4" FLOOR

## OPTIONAL EQUIPMENT

- Dolly Wheel
- Extra Height
- Sidewall Vents
- Stabilizer Jacks
- 12V Wall Switch
- Rear Ramp Door
- Spare Tire & Wheel
- LED Oval Tail Lights
- 5000 lb. Floor D-Rings
- 500 lb. Wall Rope Rings
- Extend A-Frame Tongue
- Interior Spare Tire Mount
- Side Entry Door (5' wide models)
- 14" x 14" Non-Powered Roof Vent
- Electric Brakes (*trailers without brakes*)
- 3/8" Sidewall Liner (*single axle models*)
- Flush Lock (*add to existing side entry door*)



**WIDTHS — 8.5' WIDE MODELS**

**Standard:**

**.024 Prefinished White Aluminum Skin**  
*(.030 Prefinished White Aluminum Skin on 8.5' models)*



White

**Optional:**


**.030 Prefinished Aluminum Skin**



Black



Red



Silver Frost



See page 7 for complete specifications & features

**8.5' WIDE**



## SPECIFICATIONS — 4', 5', 6' & 7' WIDE MODELS

MODEL		FT461	FT581	FT5101	FT6101	FT6121	FT6122	FT7122	FT7142	FT7162
<b>Body:</b>	<b>Length</b>	7'5"	9'5"	11'5"	11'7"	13'7"	13'7"	13'7"	15'7"	17'7"
	<b>Width</b>	4'	5'	5'	6'	6'	6'	7'	7'	7'
<b>Overall:</b>	<b>Length</b>	10'1"	11'6"	13'6"	14'	16'	16'	15'8"	17'8"	19'8"
	<b>Width</b>	68"	80"	80"	92"	92"	92"	102"	102"	102"
	<b>Height</b>	78"	86"	86"	92"	92"	93"	93"	93"	93"
<b>Interior:</b>	<b>Length</b>	7'1"	9'1"	11'1"	11'3"	13'3"	13'3"	13'3"	15'3"	17'3"
	<b>Width</b>	44"	56"	56"	68"	68"	68"	80"	80"	80"
	<b>Height</b>	60"	66"	66"	72"	72"	72"	72"	72"	72"
	<b>Platform Height</b>	18"	18"	18"	18"	18"	19"	19"	19"	19"
<b>Axle:</b>	<b>Quantity</b>	Single	Single	Single	Single	Single	Tandem	Tandem	Tandem	Tandem
	<b>Capacity</b>	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.	3500 lbs.
	<b>Type</b>	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
	<b>Suspension</b>	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
	<b>Brakes</b>	N/A	N/A	N/A	N/A	N/A	Electric Drum	Electric Drum	Electric Drum	Electric Drum
<b>Tire:</b>	<b>Size</b>	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14	ST205/75R14
	<b>Load Range</b>	C	C	C	C	C	C	C	C	C
	<b>Type</b>	Radial	Radial	Radial	Radial	Radial	Radial	Radial	Radial	Radial
	<b>Wheel</b>	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke
<b>Hitch:</b>	<b>Ball Size</b>	2"	2"	2"	2"	2"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
	<b>To Top of Ball</b>	16"	16"	16"	16"	16"	17"	17"	17"	17"
<b>Weight:</b>	<b>Hitch</b>	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%
	<b>Curb (lbs.)</b>	660	935	1050	1195	1325	1740	1975	2125	2275
	<b>GVWR (lbs.)</b>	2980	2980	2980	2980	2980	7000	7000	7000	7000
	<b>Avg. Payload (lbs.)</b>	2320	2045	1930	1785	1655	5260	5025	4875	4725
<b>Rear Door:</b>	<b>Style</b>	Single Door	Single Door	Single Door	Double Doors	Double Doors	Double Doors	Double Doors	Double Doors	Double Doors
	<b>Width</b>	37.5"	51"	51"	63"	63"	63"	75"	75"	75"
	<b>Height</b>	54"	61"	61"	67"	67"	67"	67"	67"	67"
	<b>Lock Style</b>	Bar Lock	Bar Lock	Bar Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock	Cam Lock
<b>Side Door:</b>	<b>Width</b>	N/A	Optional	Optional	32"	32"	32"	32"	32"	32"
	<b>Height</b>	N/A	Optional	Optional	66"	66"	66"	66"	66"	66"
	<b>Lock Style</b>	N/A	Optional	Optional	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
	<b>Tube Main Rails</b>	2"x 3"	2"x 3"	2"x 3"	2"x 3"	2"x 3"	2"x 4"	2"x 4"	2"x 4"	2"x 4"
	<b>12V End Connector</b>	4-way	4-way	4-way	4-way	4-way	7-way	7-way	7-way	7-way
	<b>Stoneguard</b>	12"	12"	12"	12"	12"	12"	16"	16"	16"
	<b>Interior Sidewall Liner</b>	3.6 mm Lauan	3.6 mm Lauan	3.6 mm Lauan	3.6 mm Lauan	3.6 mm Lauan	3/8" Plywood	3/8" Plywood	3/8" Plywood	3/8" Plywood
	<b>Floor</b>	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood

## STANDARD FEATURES — 4', 5', 6' & 7' WIDE MODELS

- V-Nose Profile
- 32" Side Entry Door with Bar Lock (6' & 7' wide models only)
- 12V Dome Light (1)
- Starbright Stoneguard
- Ball Coupler Hitch (2" or 2 5/16")
- Top Wind Jack with Sand Pad (excluding 4' x 6' model)
- Breakaway Kit (Tandem models only)
- Safety Chains
- Entire Chassis Undercoated
- Spring Suspension Axles (4" Drop)
- 14" Radial Tires (ST205/75R14, Load Range C)
- White Spoke Wheels
- 3/4" Plywood Decking Undercoated
- .024 Prefinished White Aluminum Exterior Skin
- Smooth Aluminum Jeep Fenders (Single Axle) or Smooth Aluminum Flare Fenders (Tandem Axles)
- 12V Incandescent Tail/Marker/Clearance Lights
- 24" OC Floor Crossmembers
- 24" OC Vertical Posts
- 24" OC Roof Trusses
- 2-Year Limited Warranty



## SPECIFICATIONS — 8.5' WIDE MODELS

MODEL		FT85162	FT85202	FT85242	FT85164	FT85204	FT85244
<b>Body:</b>	<b>Length</b>	17'10"	21'10"	25'10"	17'10"	21'10"	25'10"
	<b>Width</b>	8.5'	8.5'	8.5'	8.5'	8.5'	8.5'
<b>Overall:</b>	<b>Length</b>	19'6"	23'6"	27'6"	19'6"	23'6"	27'6"
	<b>Width</b>	102"	102"	102"	102"	102"	102"
	<b>Height</b>	101"	101"	101"	102"	102"	102"
<b>Interior:</b>	<b>Length</b>	17'6"	21'6"	25'6"	17'6"	21'6"	25'6"
	<b>Width</b>	96"	96"	96"	96"	96"	96"
	<b>Height</b>	78"	78"	78"	78"	78"	78"
	<b>Platform Height</b>	19"	19"	19"	20"	20"	20"
<b>Axle:</b>	<b>Quantity</b>	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
	<b>Type</b>	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
	<b>Capacity</b>	3500 lbs.	3500 lbs.	3500 lbs.	5200 lbs.	5200 lbs.	5200 lbs.
	<b>Suspension</b>	Spring	Spring	Spring	Spring	Spring	Spring
	<b>Brakes</b>	Electric Drum	Electric Drum	Electric Drum	Electric Drum	Electric Drum	Electric Drum
<b>Tire:</b>	<b>Size</b>	ST205/75R15	ST205/75R15	ST205/75R15	ST225/75R15	ST225/75R15	ST225/75R15
	<b>Load Range</b>	C	C	C	D	D	D
	<b>Type</b>	Radial	Radial	Radial	Radial	Radial	Radial
	<b>Wheel</b>	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke	White Spoke
<b>Hitch:</b>	<b>Ball Size</b>	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
	<b>To Top of Ball</b>	20"	20"	20"	21"	21"	21"
<b>Weight:</b>	<b>Hitch</b>	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%	10% - 15%
	<b>Curb (lbs.)</b>	2800	3100	3500	3000	3300	3700
	<b>GVWR (lbs.)</b>	7000	7000	7000	10,000	10,000	10,000
	<b>Avg. Payload (lbs.)</b>	4200	3900	3500	7000	6700	6300
<b>Rear Door:</b>	<b>Style</b>	Ramp Door	Ramp Door	Ramp Door	Ramp Door	Ramp Door	Ramp Door
	<b>Width</b>	91"	91"	91"	91"	91"	91"
	<b>Height</b>	75"	75"	75"	75"	75"	75"
	<b>Lock Style</b>	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
<b>Side Door:</b>	<b>Width</b>	32"	32"	32"	32"	32"	32"
	<b>Height</b>	72"	72"	72"	72"	72"	72"
	<b>Lock Style</b>	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock	Bar Lock
	<b>Tube Main Rails</b>	2"x 6"	2"x 6"	2"x 6"	2"x 6"	2"x 6"	2"x 6"
	<b>12V End Connector</b>	7-way	7-way	7-way	7-way	7-way	7-way
	<b>Stoneguard</b>	24"	24"	24"	24"	24"	24"
	<b>Interior Sidewall Liner</b>	3/8" Plywood	3/8" Plywood	3/8" Plywood	3/8" Plywood	3/8" Plywood	3/8" Plywood
	<b>Floor</b>	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood	3/4" Plywood

## STANDARD FEATURES — 8.5' WIDE MODELS

- V-Nose Profile
- Rear Ramp Door with Spring Assist
- 16" Plywood Ramp Extension
- Beavertail (16' model = 32", 20' & 24' models = 48")
- 32" Side Entry Door with Bar Lock
- 12V Dome Light (2)
- 24" Starbright Stoneguard
- Ball Coupler Hitch (2 5/16")
- Top Wind Jack with Sand Pad
- Breakaway Kit
- Safety Chains
- Entire Chassis Undercoated
- Spring Suspension Axles (4" Drop)
- 15" Radial Tires with White Spoke Wheels
- 3/4" Plywood Decking Undercoated
- .030 Prefinished White Aluminum Exterior Skin
- Smooth Aluminum Flare Fenders
- Sidewall Vents
- 12V Incandescent Tail/Marker/Clearance Lights
- 24" OC Floor Crossmembers
- 16" OC Vertical Posts
- 24" OC Roof Bows
- 2-Year Limited Warranty



## STANDARD FEATURES (MODEL SHOWN — FT6121)




Standard Features, Specifications & Dimensions subject to change without notice.



- Radial Tires
- White Spoke Wheels
- Smooth Aluminum Fenders
- Sealed Double Bulb DOT Approved Fender Lights



- 12V Dome Light

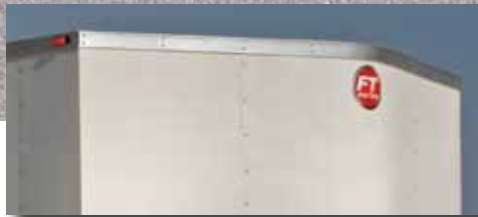

- V-Front Profile
- Extruded Aluminum Top Trim
- Sealed Double Bulb DOT Approved Clearance Lights



- Ball Coupler Hitch (2" or 2 5/16")
- Front Jack with Sand Pad
- Starbright Stoneguard
- Safety Chains



- 3.6 mm Luan Interior Sidewall Lining (3/8" on Tandem axle models)
- 3/4" Plywood Floor Undercoated



BY UNIVERSAL TRAILER

©Wells Cargo, Inc. 2011 LITHO USA Form FASTTRAC 0511

(800) 348-7553 [www.wellscargo.com](http://www.wellscargo.com)

Elkhart, IN  
McAdoo, PA

Waco, TX  
Phoenix, AZ

Ogden, UT  
Waycross, GA